



truax COMPANY, INC.

Phone: 763-537-6639

Fax: 763-537-8353

Website: www.truaxcomp.com

E-mail: truax3@qwestoffice.net

Trillion SEEDERS

Success begins with a **Truax Trillion**



Skid Steer and 3-Point


- Truax Trillions now available with skid steer mounts and 3-point hitch that provide the push/pull maneuverability and versatility to tackle the roughest sites.

Truax excellence begins with seed metering and delivery!

The truth about seed boxes...

All Truax planting equipment features multiple seed box design that has the ability to handle a variety of seeds. The seed boxes allow the versatility to seed several crops with the same planter.

- A single machine plants turf grasses, wildflowers or forbs, native grasses, introduced grasses, legumes and cover crops.
- It handles combine-run and hand-collected seed since the chaffy seed does not have to pass through a seed tube.



Fluffy Seed Box

The auger/agitator prevents seed bridging.




Fluffy Seed Box

Picker wheels feed the seed to oversized transitions.



Cool Season/Grain Box

Agitators keep seed flowing.



Cool Season/Grain Box

Inside row dividers are an option for uniform seed distribution.



Small Seed Box

Row dividers keep seed distributed across the box width.

**Truax Products =
Effective Multi-
Species Planting**



Truax Trillion has forklift pockets!

- Forklift pockets on TR-48, TR-60 and TR-96 models for easy loading, unloading and portability.



Dual transport wheels are standard on the TR-120 and TR-144 models.

- Truax Trillion dual rear transport model for seeding larger, prepared seedbeds.






Truax excellence equals correct seed placement!

Baffles direct seed as a broadcast seeding between the cultipacker rollers.

- The leading roller crushes clods, removes air pockets, and presses down small stones forming a smooth, firm seedbed in front of seed drop.
- The second cultipacker roller splits the shallow ridges formed by the front roller, gently firming the soil around the seeds, ensuring shallow seed placement and excellent seed-to-soil contact.
- Notched rollers create little pockets on the soil surface to trap moisture. Seeds are placed in the top 1/4-1/2" of soil for rapid germination and seedling development.

Truax swept back mud deflecting rollers!

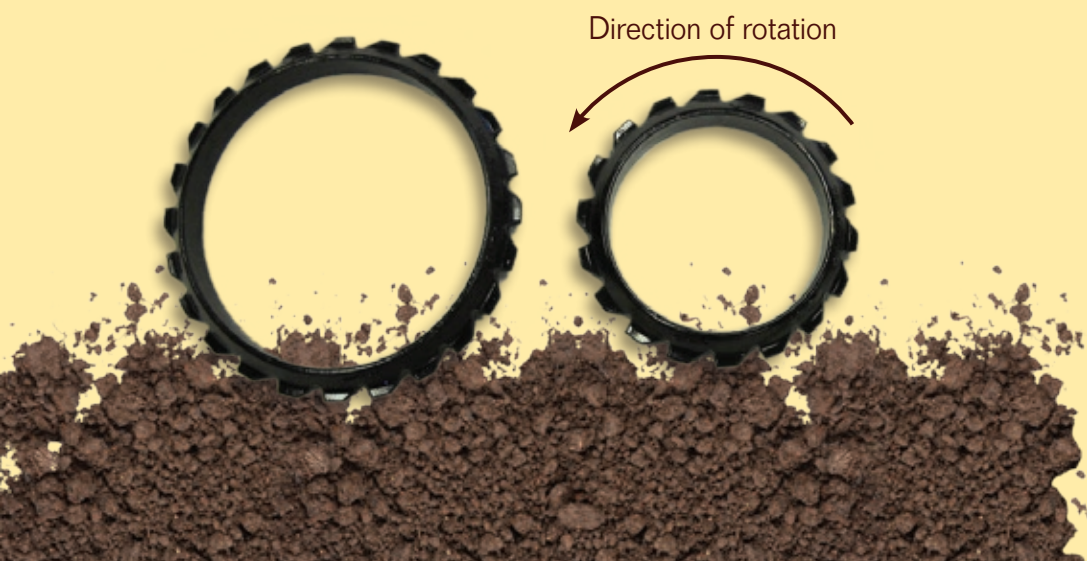

No rows and mud-deflecting roller!

- Trillions meet the challenge for shallow seed placement on a prepared seedbed by combining the Truax seed box design with Truax's swept back, mud-deflecting rollers.
- Contoured knobs on wheel castings deflect mud on moist sites resulting in a seedbed planting with no row effect.

Beginning early 2017

Item	TR48		TR48SS	TR60	TR60SS	TR96	TR96SS	TR96 END WHEEL	TR120	TR144
Approximate Weight (lbs)	1,300		1,650	1,680	2,030	2,950	3,300	3,680	3,990	5,030
Working Width	4-ft			5-ft		8-ft			10-ft	12-ft
Transport Width (w/shipping skid)	6-ft					124-in		148-in		172-in
Transport Height (w/shipping skid)	62-in									
Road Clearance	N/A							8-10 in	10-12 in	
Overall Height	46-in					50-in				
Overall Length	5-ft			6-ft		9-ft		10-ft	11-ft	13-ft
Seed Box Capacity- Small Meter Box	1.0 bu			1.25 bu		2.0 bu			2.5 bu	3.0 bu
Seed Box Capacity- Agitator Box Fluffy	4.04 bu			5.05 bu		8.08 bu			10.1 bu	12.12 bu
Seed Box Capacity- Agitator Box Cool Season	4.4 bu			5.5 bu		8.8 bu			11 bu	13.2 bu
Fork Lift Pockets	standard								N/A	
Seed Meters	fluted feed rollers with adjustable shift lever									
Seed Meter Drive	ground driven									
Seed Meter Opening Spacing	7-13/16 in									
Seed Delivery	baffle with built-in anti shift fins									
Pulverizer Roller Front (diameter)	11.75 in					16 in				
Pulverizer Roller Rear (diameter)	9.5 in					11.75 in				
Pulverizer Axle Bearings	ball bearing grease-able									
Pulverizer Axle Size Front (diameter)	1.5 in									
Pulverizer Axle Size Rear (diameter)	1.5 in									
Hitch	3-point	skid steer and 3-point	3-point	skid steer and 3-point	3-point	skid steer and 3-point	pull type tongue	pull type tongue with rear transport		
Hydraulic Equipment	N/A							lift end wheel cylinder	rear transport cylinder	
Tire Size	N/A							9.5Lx15SL 8-ply implement tire		
Safety Chain	N/A							optional		
Horsepower Requirements	24-32 HP			30-40 HP		48-64 HP			60-80 HP	72-96 HP
Recommended Operating Speed	3-6 mph									

Standard Features on all Trillion Seeders

SMV Emblem

Powder Coat Paint, black and pastel yellow

Optional Features on all Trillion Seeders

Quick Attach

S-Tine Wheel Track Remover

Digital Acre Meter

Safety Warning Lights



Phone: 763-537-6639 • Fax: 763-537-8353 • Website: www.truaxcomp.com • E-mail: truax3@qwestoffice.net